


# DSR10AB

## 1U SPLITTER/BOOSTER WITH A/B INPUT SWITCH FOR EACH OUTPUT

The DSR10AB 1U DMX splitter provides 10 DMX ports with selection from two DMX inputs. Unit is designed with installers and system integrators in mind. The splitter features a PowerCon power in and full-range power supply which allows worldwide use. All connectors are made by Neutrik and are gold-plated.

The input and all output ports are protected by optical isolation. The splitter/booster is safe guarded and the connected equipment is protected against power surges and dangerous ground loops.

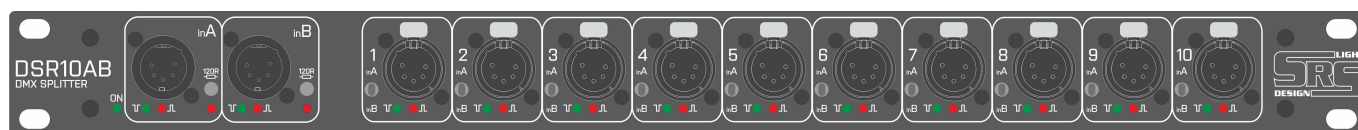

- **2x optically isolated input with DATA indication**
- **2x 120R termination for each input**
- **Overvoltage protection of DMX input/output**
- **10x optically isolated outputs with input selector switch**
- **DMX in/output LED indication**
- **Neutrik connectors**
- **Life-time warranty**

### DMX input/output

10xUSITT DMX 512

Each input/output is optically isolated up to 1000V

Each output is equipped with LINE driver/booster

DMX line state indication with two DATA LEDs

### Power supply

AC 100-255VAC / 50-60Hz / 15W

PowerCon input, 1.8m cable with UniSchuko

### XLR 3-/5-pin connector (Neutrik®)

Pin 1	Data CMN
Pin 2	DATA -
Pin 3	DATA +
Pin 4, 5	NC

